

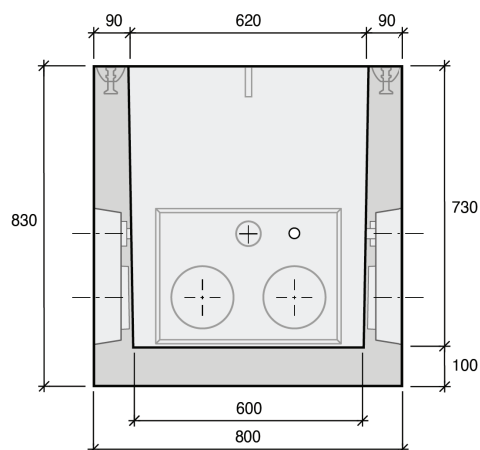


Fondation d'ancrage et dalle d'attente de fermeture standard, en béton ultra bas carbone, prêtes-à-poser, pour l'installation de bornes de recharge de type DC

ULTRA BAS CARBONE



VUE DE CÔTÉ




**ZOOM MASQUE
PRÉ-CASSABLE**

Technical drawing of a square base plate with a central rectangular cutout. The plate has a total width and height of 850 mm. The central cutout has a width of 435 mm. The plate is 30 mm thick and is designed to be cut with a grinding wheel. It features four mounting holes and four lifting anchors. A dimension of 170 mm is shown for the distance from the bottom edge to the bottom of the cutout.

Labels and dimensions:

- 850 (Total width and height)
- 435 (Width of the central cutout)
- 30 (Thickness of the plate)
- 170 (Distance from the bottom edge to the bottom of the cutout)
- Mask épaisseur 30 découppable à la meuleuse (Mask thickness 30, cuttable with a grinding wheel)
- 4 trous de fixation de la dalle (4 mounting holes of the slab)
- Ancre de levage (Lifting anchor)

VUE DE DESSUS

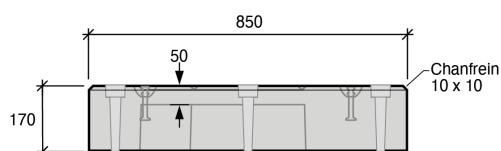

VUE DE CÔTÉ

14